
PIGTAILS



FEATURES

- Multimode & singlemode connectors SC, FC, ST, LC, MU, MTRJ, E2000
- Ultra polished connectors UPC and angle polished connectors APC
- Full tracability & test certificate supplied wich each assembly
- 100% tested for Insertion loss and return loss

SC PIGTAIL DRAWING

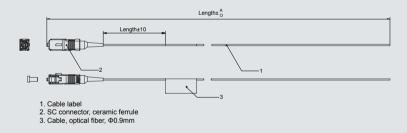


PRODUCT PACKAGING

 Each pigtail is packaged individually and individually identified for traceability, a test certificate is supplied for each assembly.

ORDERING INFORMATION

To order Optic fiber assemblies the Rougil part number follows the following sequence.

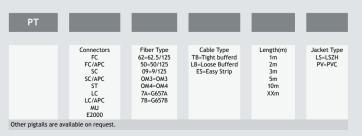

OPTIONS

- Bend insensitive fibers G657A/B
- OM4 fibers 10 Gigs at 550 meters
- Any color of cable jacket and connectors available
- OFNP plenum jacket

SPECIFICATIONS

OPTIC PERFORMANCE (MULTIMODE)	OPTIC PERFORMANC (SINGLEMODE)	
Insertion loss	Insertion loss	Return Loss
Max. 0.3 dB Typical 0.15 dB	Max. 0.3 dB Typical 0.15 dB	UPC better than 50 dB APC better than 60 dB

Conforms to Belcore GR-326



